
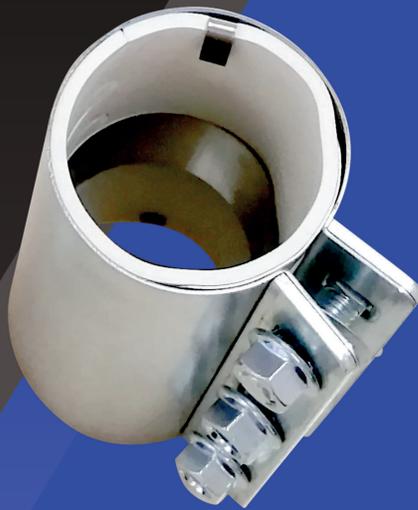
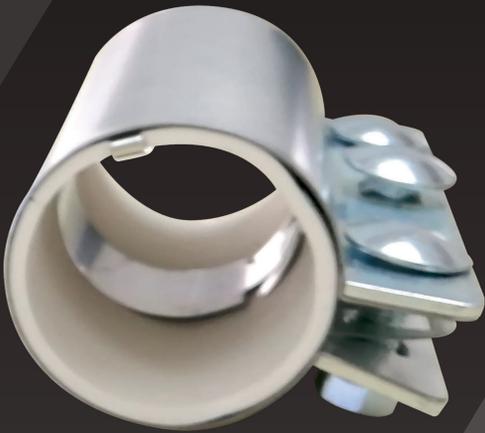
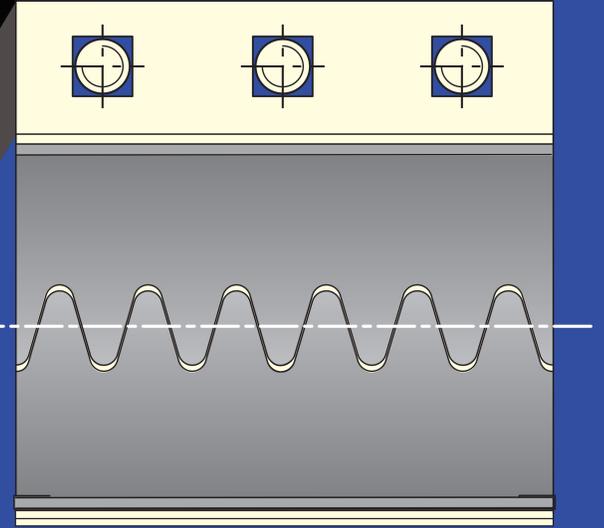
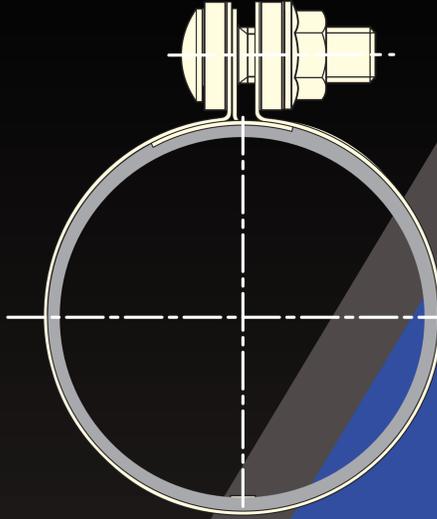


EURAC Coupling

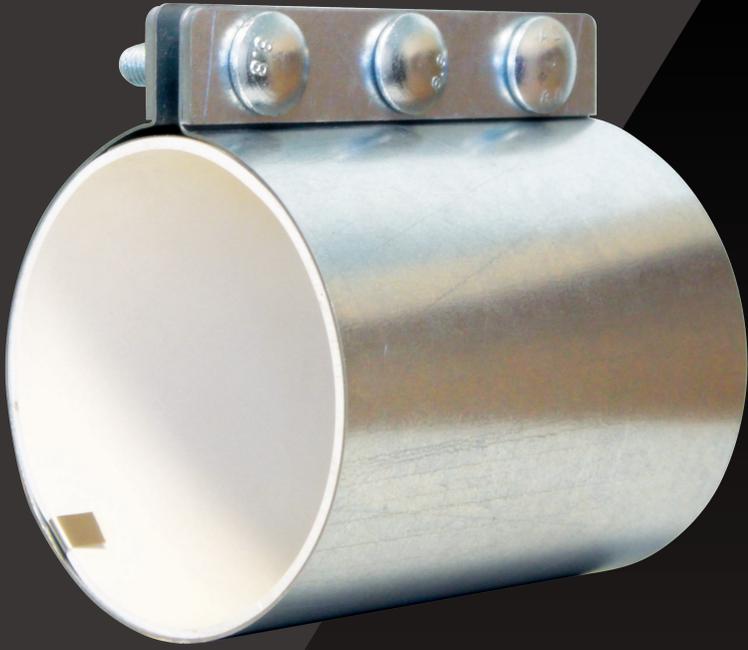

Purpose of use

EURAC Coupling made by STIF is used to connected pneumatic conveying pipes.

It is available for powder and granular pneumatic conveying pipes such as pressure, vacuum, high and low concentrations, etc.

When you connect pipes, you don't need bolts, nuts and packings. You can only use EURAC Coupling.

Therefore, this cost is 1/3~1/2 of flange connection.

Choosing this coupling will make your project earlier, cheaper, and more convenient.

Standard specifications

Temperature : -30°C~100°C

Pressure : 0~0.5MPa

Material : Galvanized steel sheet (Body • Bolt • Nut)
SUS304L (Internal parts)
White NBR -FDA Certificate Food-grade (Gasket)

Remarks

- Never re-use a coupling which has been taken down.
- Never tighten over the torque which is indicated in the table above.
- Before any servicing on the coupling makes sure that the tubes are free from pressure, products, temperature etc.

Model

Diameter	Range
φ38.1	150mm
φ48.3	
φ50/50.8	
φ54	
φ60/60.3	
φ63/63.5	
φ65	
φ70	
φ73	
φ76.1	
φ80	
φ85	
φ88.9	
φ100	
φ101.6	
φ104	
φ108	
φ114.3	

※Inside



บริษัท ไอชิน อินดัสทรีเรียล (ไทยแลนด์) จำกัด
AISHIN INDUSTRIAL (THAILAND) CO.,LTD.



AISHIN JAPAN



AISHIN THAILAND



INTRODUCTION BY SAMURAI ASIA